

EAGLELINE PREMIUM GRADE SELF-SERVE CAR WASH EQUIPMENT

HIGH PRESSURE STANDARD FEATURES

- Stainless steel pump frames with adjustable leveling feet or casters
- Individual electric control panels. Optional stainless steel control panel enclosure available. Both items are ETL/CSA listed.
- Cat Pumps, General Pump, Giant, or Arimitsu plunger pumps – equipped with pressure regulators, 3000psi pressure gauges, oil drains, and twin belt pulleys with belt guards
- Sliding motor bases with 5HP, 3-phase electric motors and belt tensioners
- Stainless steel tanks with hydrominders, strainers, and ball valves
- Optional low water cut-off system for pump protection
- Air driven low-pressure pumps for tire and pre-soak functions
- Cold water rinse system with solenoid valve and individual shut-off valves
- Standard unit comes with:
High pressure features: soap, wax, and rinse
Low pressure features: foaming tire cleaner, foaming pre-soak, and foaming brush systems
Spot-free re-pressurization system

BAY HARDWARE STANDARD FEATURES

- Stainless steel meter boxes with bill acceptance, electronic coin acceptors, digital display timers, ten-position rotary switch, color-coded function decals and last coin alert
- Stainless steel Mosmatic Z Booms with 360° swivels and 14' wire braid bay hoses
- Trigger guns with flex wands, hardened stainless steel spray nozzles, swivels, and gun holders
- Hogs hair brushes, wands, swivels, brush bucket, and hose
- Bay instruction signs with color-coded product decals
- Mat clamps
- Bay supply control wire included

ADDITIONAL OPTIONS & ACCESSORIES

- Credit card systems: Hamilton, Unitec, or CryptoPay
- Bay test switches
- Tamper-proof coin meter vaults
- Wall mount digital display bay timers and last coin alert
- Weep system



SIMPLICITY

Each function has its own stainless steel low-pressure manifold that allows for easy access and maintenance.

COST SAVINGS

We use Leeson premium efficiency motors.

TOP-QUALITY PUMPS

Our equipment comes with the best plunger pumps available on the market.

EASY MAINTENANCE

Sliding pump bases enable you to complete routine maintenance with ease.

SAVES SPACE

The stack frame makes it simple to fit the Eagleline into tight spaces. Custom frame designs are also available.

DURABILITY

Outfitted with a stainless steel frame, bases, belt guards, pump rails, and hardware. This equipment is solid and long-lasting.

TOTAL CONTROL

The stainless steel electronic control cabinet house gives you quick access to the controls you need. Featuring: 24VAC transformer, motor starter with overload relay, and a pump hour meter.





1-800-537-6788
sales@carwashsuperstore.com



SELF-SERVE 4 PAWS PET WASH SYSTEMS

A coin operated self-serve pet wash is an easy and convenient alternative to cleaning pets at home or taking them to a grooming center. Install in a converted car wash bay or in a separate building. Also available with manual operation for grooming centers, kennels, and veterinarians.

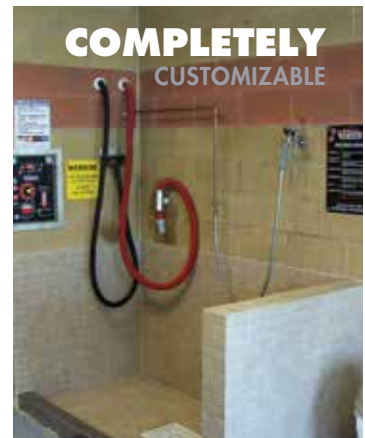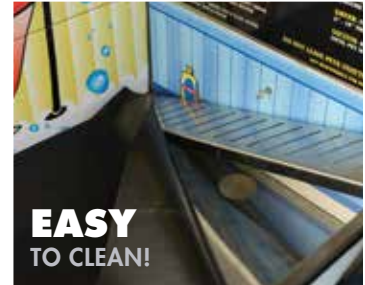

STANDARD FEATURES

- Stainless steel tub with mat
- Easy access stainless steel steps with mat
- Control panel, supply manifold and dryer mounted on wall mount frame (mount in equipment room)
- Pet safety tie
- Spray wand with stainless steel hose
- Grooming dryer with hose
- Seven functions: shampoo, conditioner, flea and tick disinfectant, deodorize, rinse and dry - comes with start-up chemicals
- Low voltage cable from coin meter to control panel
- Water pressure reducing valve and tempering valve
- 4 Paws pet decals and instruction sign
- Dimensions: 55 7/8" (L) x 34" (W) x 36" (H)

CUSTOMER REQUIREMENTS

- 120VAC, 20 AMP electric service
- 1/2" water supply at 40PSI and 100°F max
- 1 1/2" sewer line connection
- Water heater
- Room heater and air conditioner
- Minimum 100 sq. ft. floor space



AVAILABLE SIGNS

Call for details on the different signs available for your location.



For updated pricing visit
carwashsuperstore.com



PREMIUM GRADE BAY METER BOXES



RELIABLE SECURITY

Each box is outfitted with high security Medeco plug locks and a 1/4" lock bar with a Diskus lock.

TOUGH & RUGGED

Solidly built with 304 stainless steel, the walls of our meter boxes are over 33% thicker than the competition's.

MULTI-COIN ACCEPTOR

Select the coin mech that works best for you.

TEN-POSITION ROTARY SWITCH

Give your customer clear choices easily differentiated by color.

CONVENIENCE FOR YOUR CUSTOMERS

A safe and convenient credit card system can be added to any meter box. This makes transactions quick and hassle-free for both you and your customers.

CUSTOM DECAL

Customize the decal to match your brand and give each bay a cohesive look.

MARS BILL ACCEPTOR

Accepts \$1, \$5, \$10, and \$20 bills.



1-800-537-6788
sales@carwashsuperstore.com



THE MOST SECURE & RUGGED BOX IN THE CAR WASH INDUSTRY

DIMENSIONS

13.5" W x 17.5" H x 8.5" D

STANDARD FEATURES

- Mars bill acceptor (500 bill stacker)
- Multi-coin acceptor
- LED7 display timer
- Last minute alert horn
- 10-position rotary switch
- High security Medeco plug locks (2)
- (2) 1/4" lock bars and Diskus locks
- 24VAC internal heater
- Quick disconnect terminal strip
- Customized decals
- UL & CSA rated

ADDITIONAL OPTIONS

- 8-position or 12-position rotary switch
- Vault ready, internal coin tray, or external coin box
- Credit card systems: Hamilton, Unitec, or CryptoPay
- Weather shield
- SAF-12 coin vaults (SS, Square, Medeco Lock)
- Rear entry



IF YOU ARE LOOKING FOR
TOP QUALITY BAY METERS
LOOK NO FURTHER



For updated pricing visit
carwashsuperstore.com



SPOT-FREE RINSE SYSTEMS

At National Pride, we are committed to bringing you premium grade products – equipment that is reliable, durable, and easy to operate. Our space saving design helps units fit into tight or small pump rooms and range from 4,000 to 12,000 gallons per day. Each unit is thoroughly tested before shipment, ensuring that you receive a product of the highest quality.

STANDARD FEATURES

- Stainless steel floor mount frame
- Built-in TDS meter
- 12" x 48" carbon tank
- Stainless steel multi-stage pump
- Float switch
- Heavy duty PVC membrane housings
- XLE 4040 membranes
- 5 Micron pre-filter and housing
- 1.5 cubic feet carbon de-chlorinator
- Float kit
- Pre-filter



MODEL NO.	GPD	HOUSING	MEMBRANE	AUTOFLUSH	HP
NPRO4000S	4,000	Heavy Duty PVC	(2) XLE-4040	Yes	Sta-Rite 2.0HP
NPRO6000S	6,000	Heavy Duty PVC	(3) XLE-4040	Yes	Sta-Rite 2.0HP
NPRO8000S	8,000	Heavy Duty PVC	(4) XLE-4040	Yes	Sta-Rite 2.0HP
NPRO10000S	10,000	Heavy Duty PVC	(5) XLE-4040	Yes	Sta-Rite 3.0HP
NPRO12000S	12,000	Heavy Duty PVC	(6) XLE-4040	Yes	Sta-Rite 3.0HP



1-800-537-6788
sales@carwashsuperstore.com





R.O. ACCESSORIES



SEDIMENT FILTERS

CARBON BLOCK FILTERS

FILTERS (FOR R.O. MEMBRANES)

ITEM #	SIZE	MICRONS	TYPE
TW1005	2.5" x 10"	5	Sediment Filter
TW2005	2.5" x 20"		
TWBB1005	4.5" x 10"	5	
TWBB2005	4.5" x 20"		
TW1F2007	2.5" x 10"	5	Carbon Block Filters
TW1F2008	2.5" x 20"		
TW1F2003	2.5" x 10"	10	
TW1F2004	2.5" x 20"		
TW1F2009	4.5" x 10"	5	
TW1F2011	4.5" x 20"		
TW1F2010	4.5" x 10"	10	
TW1F2012	4.5" x 20"		

HOLDING TANKS AVAILABLE. CALL FOR SIZES AND PRICING.



HOUSING

ITEM #	DIMENSIONS	SIZE	TYPE
TW150469	4.5" x 10"	3/4"	Gray
TW150467	4.5" x 20"	3/4"	
TW150237	4.5" x 10"	1"	
TW150233	4.5" x 20"	1"	

HOUSING BRACKET

ITEM #	TYPE
TW150061	4.5" White Steel

MEMBRANE HOUSING

ITEM #	DIMENSIONS	TYPE	PSI
TW202921	2.5" x 40"	SS	250
TW202923	4" x 40"	SS	250
TW208419	4" x 40"	Fiberglass	300



R.O. MEMBRANES (99% NOMINAL SALT REJECTION)

ITEM #	SIZE	GPD	PSI
TW30-2521	2.5" x 21"	250	225
TW30-2540	2.5" x 40"	650	
TW30-4021	4" x 21"	900	
TW30-4040	4" x 40"	2200	

R.O. MEMBRANES (ENERGY EFFICIENT) (98.5% NOMINAL SALT REJECTION)

ITEM #	SIZE	GPD	PSI
TW30LP-2540	2.5" x 40"	1000	150
TW30LP-4040	4" x 40"	2500	
TW30XLE-4040	4" x 40"	2500	100



TW1N1001



TW1N1006



GG2DW2000



SWF9011

R.O. ACCESSORIES

ITEM #	DESCRIPTION
TW1E3001	Saddle Clamp for 2.5" PVC Membranes
TW1E3005	Saddle Clamp for 4" PVC Membranes
TW1N1001	Handheld Digital pH-80 Meter
TW1N1006	Handheld Digital TDS meter
GG2DW2000	Mechanical Switch — ABS housing, 13 amps. 115-230VAC. SPDT, 20' cord. Can be used for low level or high level control. Ideal for R.O. system tanks.
SWF9011	Tilt Float Liquid Level Switch (6.5' cable)



For updated pricing visit carwashsuperstore.com





.0" / 1.25" WATER SOFTENERS (VS2-100/125 SERIES)
 Ideal for feeding RO's and chemical applications, this system flows up to 28 gpm. Features a durable, corrosion resistant Noryl bodied control valve(s), by-pass assembly with in/out valves and an advanced 1-step programming controller. Multiple tank configurations are available.



1.5" / 2.0" WATER SOFTENERS (VS2-150/200 SERIES)
 This system packs flow rates of up to 100 gpm for heavy duty applications. The hefty construction boasts brass bodied valves and SS flow meters with an advanced digital display controller. Multiple tank configurations and headers are available.



1.0" / 1.25" CARBON FILTERS (V F1-100/125 SERIES)
 Designed to remove chlorine from municipal water supplies, this system is commonly used to pretreat RO systems to protect the membranes. Our carbon filter features a by-pass assembly with In/out valve and designed for years of reliable operation.



REJECT WATER RECOVERY SYSTEMS (RRS SERIES)
 Capture your RO reject water with a Velocity Reject Water Recovery System instead of sending it down the drain. System sizes are available to fit a wide range of applications, no matter the volume of demand.



VFD BOOSTER PUMP SYSTEMS (VVF SERIES)
 Complete turnkey system is designed for dependable performance and long life. This system includes a stainless steel frame, inlet check valve and outlet assembly (brass, stainless steel or PVC) that includes a pressure gauge, relief valve, pressure transducer, 2.0" shut-off valve and safety shut-off flow switch.



VELOCITY WATER WORKS
Elevating the Standard.

*MODEL #	VALVE	CAPACITY (MED/MAX)	FLOW RATE (SERVICE/PEAK)
VSS2-100-30	1.00"	25,000 / 30,000	15gpm / 22gpm
VSS2-100-60		50,000 / 60,000	18gpm / 25gpm
VS2-100-90		75,000 / 90,000	20gpm / 27gpm
VS2-125-75	1.25"	62,500 / 75,000	23gpm / 32gpm
VS2-125-120		100,000 / 120,000	26gpm / 35gpm
VS2-125-150		125,000 / 150,000	28gpm / 37gpm

*Additional sizes available. Call for more information.

*MODEL #	VALVE	CAPACITY (MED/MAX)	FLOW RATE (SERVICE/PEAK)
VS2-150-120	1.50"	100,000 / 125,000	40gpm / 56gpm
VS2-150-150		125,000 / 150,000	45gpm / 64gpm
VS2-150-210		175,000 / 210,000	47gpm / 62gpm
VS2-150-300	2.0"	250,000 / 300,000	53gpm / 69gpm
VS2-200-150		125,000 / 150,000	62gpm / 85gpm
VS2-200-180		150,000 / 180,000	64gpm / 90gpm
VS2-200-240		200,000 / 240,000	74gpm / 101gpm
VS2-200-300		250,000 / 300,000	71gpm / 100gpm

*Additional sizes available. Call for more information.

MODEL #	VALVE	MEDIA VOLUME
VF1-100-010	1.00"	1.0 Cu Ft
VF1-100-015		1.5 Cu Ft
VF1-100-020		2.0 Cu Ft
VF1-100-025		2.5 Cu Ft
VF1-125-040	1.25"	4.0 Cu Ft
VF1-125-050		5.0 Cu Ft
VF1-125-060		6.0 Cu Ft

MODEL #	DESCRIPTION
RRS-20-LLF	1/2hp Submersible Pump (120V), 6ga Pressure Tank
RRS-40-LLF	1.0hp Pump, 19ga Pressure Tank
RRS-60-LLF	2.0hp Pump, 35ga Pressure Tank
RRS-90-LLF	3.0hp Pump, 35ga Pressure Tank

*Systems also available with SS Pumps and 1-Phase & 3-Phase Configurations.

*Reject Holding Tanks ordered separately.

MODEL #	DESCRIPTION
VVF-5-460	5hp Pump, 140gpm @ 55psi boost
VVF-5-100	5hp Pump, 100gpm @ 55psi boost
VVF-3-070	3hp Pump, 70gpm @ 55psi boost
VVFHP-4-460-70	4hp Pump, 56gpm @ 70psi Boost
VVFHP-10-460-200	10hp Pump, 55gpm @ 200psi Boost



1-800-537-6788
sales@carwashsuperstore.com

